



# FOLDED GRID 018

GRD-FLD-018

# **Product Specifications**

Product Name	Folded Grid 018
Product ID	GRD-FLD-018
Acoustics	0.55 - 0.95 NRC*
Lead Time	Lead time is dependent on project size. Contact us for more information.
Durability	Contract

Warranty	Comes with industry-leading standard warranty.					
Flammability	ASTM E84: Class A					
Custom	Custom colors and manufacturing services available. Additional charges and lead times may apply.					
	Vacuum occasionally to remove airborne dust or debris. Mild detergents or soaps may be used to remove stains. For detailed care instructions, refer to the <b>CSI Creative Maintenance Information</b> document.					

### **Material Specifications**

	Soundcore®
Content	Recycled PET acoustic felt
Weathering	Colorfast, non-deteriorating, non-hygroscopic
	Recycled PET acoustic felt is 60% post-consumer recycled content and is 100% recyclable. Contributes points toward LEED v4. CDPH v1.2, VOC free, non-toxic, non-allergenic, anti-microbial - does not attract mold and mildew. Compliant with Living Building Challenge criteria & DECLARE Red List Free.
Variation	PET felt panels are created through a manufacturing process known as 'felting'. This process results in a heathered appearance. Multiple color tones may appear in the same panel. Slight color variations should be expected.





\*Approximate. NRC rating may vary due to product dimensions and spacing.




### Dimensions


#### **Standard Unit Dimensions**

Typical ranges for length and width.

#### **Standard Unit Thicknesses**

Thickness is independent of material layer selection.

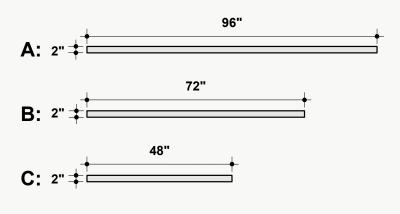




### **Custom Opportunity**

Product dimensions can be manipulated in order to fit your design aesthetic and site conditions.




**Product Details** 

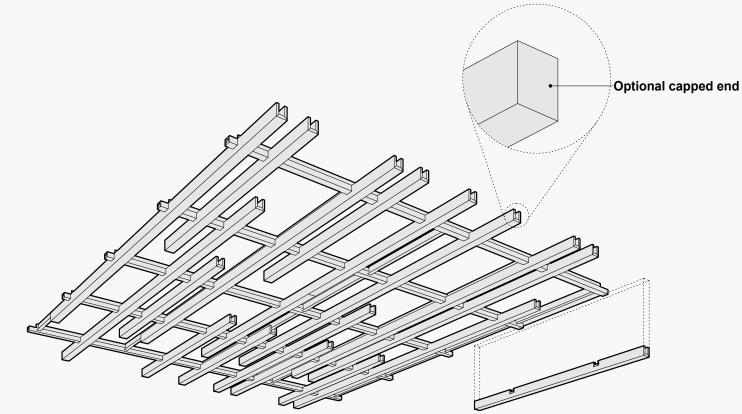




### **Configuration Options**

The layouts shown are a summation of individual units. Individual units may be assembled in various arrangements to dictate the larger design. Configurations shown are suggested, but can be rearranged to achieve a custom layout.





Uniform






### Installation Options\*

All products and installation methods can be customized to meet the unique requirements of your space.

#### **Press-Fit**

- + Allows for product to ship flat
- + Substrate based, no hardware needed
- + Visually obstructs metal grid structure

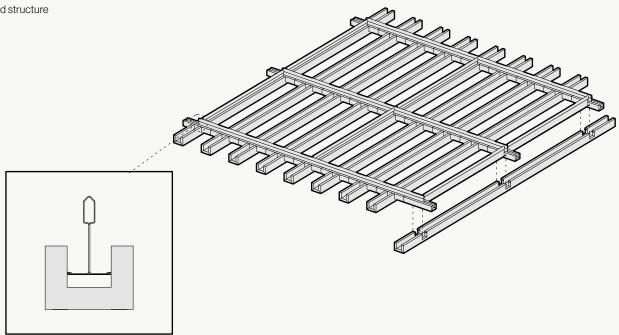

\*Not all listed attachment methods may be applicable to this product.



# Material Layers

#### Soundcore®

Our recycled PET felt creates an acoustic barrier, defending against wandering white noise and irritating echoes.






Single Layer ½" Thickness

### Soundcore® Wood Textures

Soundcore<sup>®</sup> wood textures provide the natural aesthetic of wood while maintaining all the acoustic benefits of PET felt. Custom texture opportunities are also available upon request.



Single Layer ½" Thickness





Soundcore® | 1/2" Thickness

SND019 Linen	SND037 Paper	SND134 Oat	<b>SND135</b> Vanilla Bean	SND105 Sand Dollar	SND109 Macadamia	SND111 Lanai	SND130 Buckskin	SND131 Abalone	SND125 Chinchilla
SND118 Anchor	SND126 Wolfhound	SND110 Starry Night	SND102 Morning Fog	SND114 Lunar Dust	<b>SND034</b> Granite Peak	SND132 Cast Iron	SND103 Storm Cloud	SND038 Inkwell	SND122 Briquette
SND127 Burnt Toast	SND108 Ablaze	<b>SND104</b> Pumpkin	SND106 Goldfinch	SND113 Gruner	SND129 Dried Thyme	SND107 Grasshopper	SND136 Clover	SND138 Fern	SND137 Cove
SND112 Tulum	<b>SND139</b> Tidal	SND121 Apatite	SND123 Chrysocolla	SND117 Serene	SND124 Ice Floe	SND115 Mako	SND128 Arctic Ocean	SND133 Galactic	<b>SND116</b> Blue Marlin
SND042 Denim	SND140 Marine	SND101 Commodore							



### Soundcore® Wood Textures | 1/2" Thickness





SND792 Dark Oak







SND709



English Walnut











SND713 Honey Walnut

SND717 Warm Oak

SND790 Natural Teak

SND712 Natural Spruce





SND795 Light Teak

White Maple

SND793

Vintage Maple

SND791

Gray Oak



Warm Teak

SND710 Gray Teak

